



ICM LCD BAR DISPLAY

DIGITAL SIGNAGE
ANDROID INTEGRATED SMART DISPLAY

POWER ON, CONNECT WI-FI, & READY TO PLAY!



GOLD FAME TECHNOLOGY

WEBSITE: [HTTPS://ICM.GOLDFAME.COM](https://icm.goldfame.com)

EMAIL: [ICM@GOLDFAME.COM](mailto:icm@goldfame.com)

TEL: + 852 2330 - 8319

FAX: + 852 2947 - 5082



GOLD FAME TECHNOLOGY

WEBSITE: [HTTPS://ICM.GOLDFAME.COM](https://icm.goldfame.com)

EMAIL: ICM@GOLDFAME.COM

TEL: + 852 2330 - 8319





FAX: + 852 2947 - 5082



66.6" LCD BAR DISPLAY

DIGITAL SIGNAGE

ANDROID INTEGRATED SMART DISPLAY

-  - RUNS ANDROID 7.1
-  - 3840 X 810 PIXEL RESOLUTION (4K DISPLAY PANEL)
-  - ULTRA WIDE VIEWING ANGLE IPS TFT RGB COLOR DISPLAY
-  - REMOTE MANAGEMENT EASILY VIA WI-FI & **ICM** SERVER
(BUILT-IN **ICM** PLATFORM / COMPATIBLE WITH CLIENTS' OWN SET-UP)

Specifications

Product Name	66.6 inch LCD BAR DISPLAY		
Model Number	JIC-666FILARSH216-03		
Display			
Active area (mm)	1649.66(H) x 348.3(V) [66.6 inch]	Number of colors	16.7M
Bezel opening area (mm)	1654.8(H) x 354.5(V)	Display operation mode	IPS Normally black; Transflective
Outline dimension (mm)	1676.8(H) x 376.5(V) x 30.2(D)	Surface treatment	Haze 3% Hardness 2H
Display technology	a-Si TFT-LCD	Viewing angle	Full View 89/89/89/89 (typ.)(CR≥10)
Resolution	3840 x 810	Brightness	350 cd/cm ² (typ.)
Pixel pitch	0.4296(H) x 0.4296(W)	Contrast ratio	1400:1 (typ.)
Pixel arrangement	RGB vertical stripe	Frame rate	59Hz
System			
CPU	ARM Cortex-A53 A64 64bit 4-core	System	Android 7.1
RAM	2 GB (Max support: 4 GB)	Terminal	USB 2.0 x2 (support mouse control), micro SD x1, HDMI-IN x1, HDMI-OUT x1
eMMC memory	16 GB (Max support: 128 GB)		
Internet connection	10M/100M ethernet port x1, Wi-Fi 2.4G	Photo format	BMP, JPEG, PNG, GIF, etc.
Audio output	3.5 mm audio jack, 8R/3W speaker	Media format	AVI, MOV, MP4, WMV, WEBM, etc.
Power voltage	AC 100V~240V	Net weight	10.5 kg
Power consumption	124W (typ.)	VESA mounting (mm)	75 x 75, 100 x 100, 100 x 200
Power connection	IEC-C7 8-shotgun connector	Languages	Chinese, English, Japanese, Korean, etc. (Optional to language extension)
Temperature	Tst: -20~60 °C; Top: 0~50 °C		

*The floor stand in the picture above needs to be purchased separately



GOLD FAME TECHNOLOGY

WEBSITE: [HTTPS://ICM.GOLDFAME.COM](https://icm.goldfame.com)

EMAIL: ICM@GOLDFAME.COM

TEL: + 852 2330 - 8319





FAX: + 852 2947 - 5082



39.6" LCD BAR DISPLAY

DIGITAL SIGNAGE

ANDROID INTEGRATED SMART DISPLAY

-  - RUNS ANDROID 7.1
-  - 1920 X 720 PIXEL RESOLUTION
-  - ULTRA WIDE VIEWING ANGLE SUPER MVA TFT RGB COLOR DISPLAY
-  - REMOTE MANAGEMENT EASILY VIA WI-FI & **ICM** SERVER
(BUILT-IN **ICM** PLATFORM / COMPATIBLE WITH CLIENTS' OWN SET-UP)

Specifications			
Product Name	39.6 inch LCD BAR DISPLAY		
Model Number	JIC-396FMLCRSH216-03		
Display			
Active area (mm)	940.9(H) x 353.5(V) [39.6 inch]	Number of colors	16.7M
Bezel opening area (mm)	943.2(H) x 357.5(V)	Display operation mode	MVA Normally black; Transflective
Outline dimension (mm)	963.2(H) x 377.5(V) x 30.2(D)	Surface treatment	Haze 2% Hardness 2H
Display technology	a-Si TFT-LCD	Viewing angle	Full View 89/89/89/89 (typ.)(CR≥10)
Resolution	1920 x 720	Brightness	350 cd/cm ² (typ.)
Pixel pitch	0.49005(H) x 0.49005(W)	Contrast ratio	4000:1 (typ.)
Pixel arrangement	RGB vertical stripe	Frame rate	59Hz
System			
CPU	ARM Cortex-A53 A64 64bit 4-core	System	Android 7.1
RAM	2 GB (Max support: 4 GB)	Terminal	USB 2.0 x2 (support mouse control), mico SD x1, HDMI-IN x1, HDMI-OUT x1
eMMC memory	16 GB (Max support: 128 GB)	Photo format	BMP, JPEG, PNG, GIF, etc.
Internet connection	10M/100M ethernet port x1, Wi-Fi 2.4G	Media format	AVI, MOV, MP4, WMV, WEBM, etc.
Audio output	3.5 mm audio jack, 8R/3W speaker	Net weight	4.5 kg
Power voltage	Input AC 100V~240V; Output DC 12V~5A	VESA mounting (mm)	75 x 75, 100 x 100
Power consumption	46W (typ.)	Languages	Chinese, English, Japanese, Korean, etc. (Optional to language extension)
Power connection	USB Type-C		
Temperature	Tst: -20~60 °C; Top: 0~50 °C		

*The floor stand in the picture above needs to be purchased separately



GOLD FAME TECHNOLOGY

WEBSITE: [HTTPS://ICM.GOLDFAME.COM](https://icm.goldfame.com)

EMAIL: ICM@GOLDFAME.COM





TEL: + 852 2330 - 8319

FAX: + 852 2947 - 5082

35.9" LCD BAR DISPLAY

DIGITAL SIGNAGE

ANDROID INTEGRATED SMART DISPLAY

-  - RUNS ANDROID 7.1
-  - 1920 X 538 PIXEL RESOLUTION
-  - ULTRA WIDE VIEWING ANGLE SUPER MVA RGB COLOR DISPLAY
-  - REMOTE MANAGEMENT EASILY VIA WI-FI & **ICM** SERVER
(BUILT-IN **ICM** PLATFORM / COMPATIBLE WITH CLIENTS' OWN SET-UP)

Specifications			
Product Name	35.9 inch LCD BAR DISPLAY		
Model Number	JIC-359FMLCRSH216-03		
Display			
Active area (mm)	878.1(H) x 243.0(V) [35.9 inch]	Number of colors	16.7M
Bezel opening area (mm)	880.5(H) x 244.5(V)	Display operation mode	MVA Normally black; Transflective
Outline dimension (mm)	899.5(H) x 262.5(V) x 30.2(D)	Surface treatment	Haze 1% Hardness 3H
Display technology	a-Si TFT active matrix	Viewing angle	Full View 88/88/88/88 (typ.)(CR≥10)
Resolution	1920 x 538	Brightness	350 cd/cm ² (typ.)
Pixel pitch	0.45735(H) x 0.4494(W)	Contrast ratio	5000:1 (typ.)
Pixel arrangement	RGB vertical stripe	Frame rate	59Hz
System			
CPU	ARM Cortex-A53 A64 64bit 4-core	System	Android 7.1
RAM	2 GB (Max support: 4 GB)	Terminal	USB 2.0 x2 (support mouse control), mico SD x1, HDMI-IN x1, HDMI-OUT x1
eMMC memory	16 GB (Max support: 128 GB)	Photo format	BMP, JPEG, PNG, GIF, etc.
Internet connection	10M/100M ethernet port x1, Wi-Fi 2.4G	Media format	AVI, MOV, MP4, WMV, WEBM, etc.
Audio output	3.5 mm audio jack, 8R/3W speaker	Net weight	4.2 kg
Power voltage	Input AC 100V~240V; Output DC 12V~5A	VESA mounting (mm)	75 x 75, 100 x 100
Power consumption	28W (typ.)	Languages	Chinese, English, Japanese, Korean, etc. (Optional to language extension)
Power connection	USB Type-C		
Temperature	Tst: -20~60 °C; Top: 0~50 °C		



GOLD FAME TECHNOLOGY

WEBSITE: [HTTPS://ICM.GOLDFAME.COM](https://icm.goldfame.com)

EMAIL: ICM@GOLDFAME.COM

TEL: + 852 2330 - 8319





FAX: + 852 2947 - 5082



28.8" LCD BAR DISPLAY

DIGITAL SIGNAGE

ANDROID INTEGRATED SMART DISPLAY

-  - RUNS ANDROID 7.1
-  - 1920 X 605 PIXEL RESOLUTION
-  - ULTRA WIDE VIEWING ANGLE IPS TFT RGB COLOR DISPLAY
-  - REMOTE MANAGEMENT EASILY VIA WI-FI & **ICM** SERVER
(BUILT-IN **ICM** PLATFORM / COMPATIBLE WITH CLIENTS' OWN SET-UP)

Specifications

Product Name	28.8 inch LCD BAR DISPLAY		
Model Number	JIC-288FILCRSH216-03		
Display			
Active area (mm)	698.4(H) x 219.0(V) [28.8 inch]	Number of colors	16.7M
Bezel opening area (mm)	704.5(H) x 230.5(V)	Display operation mode	IPS Normally black; Transflective
Outline dimension (mm)	724.5(H) x 250.5(V) x 30.2(D)	Surface treatment	Haze 1% Hardness 3H
Display technology	a-Si TFT active matrix	Viewing angle	Full View 89/89/89/89 (typ.)(CR≥10)
Resolution	1920 x 605	Brightness	40Q cd/cm ² (typ.)
Pixel pitch	0.36375(H) x 0.36375(W)	Contrast ratio	1400:1 (typ.)
Pixel arrangement	RGB vertical stripe	Frame rate	59Hz
System			
CPU	ARM Cortex-A53 A64 64bit 4-core	System	Android 7.1
RAM	2 GB (Max support: 4 GB)	Terminal	USB 2.0 x2 (support mouse control), micro SD x1, HDMI-IN x1, HDMI-OUT x1
eMMC memory	16 GB (Max support: 128 GB)		
Internet connection	10M/100M ethernet port x1, Wi-Fi 2.4G	Photo format	BMP, JPEG, PNG, GIF, etc.
Audio output	3.5 mm audio jack, 8R/3W speaker	Media format	AVI, MOV, MP4, WMV, WEBM, etc.
Power voltage	Input AC 100V~240V; Output DC 12V~5A	Net weight	3.3 kg
Power consumption	30W (typ.)	VESA mounting (mm)	75 x 75, 100 x 100
Power connection	USB Type-C	Languages	Chinese, English, Japanese, Korean, etc. (Optional to language extension)
Temperature	Tst: -20~60 °C; Top: 0~50 °C		

THE ICM DIGITAL SIGNAGE




ALL-IN-ONE STRUCTURE

ANDROID SYSTEM EMBEDDED
ONLY POWER CABLE REQUIRED
NOT NEED EXTERNAL COMPUTER




INTERNET REMOTE CONTROL

POWER-ON, CONNECT WI-FI, THEN JUST
CONTROL WITH WEB-BASE ICM INTERFACE



PRE-SCHEDULE LAYOUT

LAYOUT PRE-SCHEDULE BY DATE & TIME
(I.E. LUNCH MENU → DINNER MENU)
AUTO-PLAYING AFTER POWER-ON



SPLIT-SCREEN SEGMENTATION

PLAYING MULTIPLE WIDGETS
IN THE SAME LAYOUT
(I.E. VIDEO, PICTURE, LIVE NEWS, TIME, ETC.)



LOCAL CONTROL

SUPPORTS VARIOUS LOCAL INPUTS
(I.E. USB, MICRO-SD, HDMI)



LOCAL LIVE SYNC


SYNC MULTIPLE DISPLAYS
BY HDMI-OUT & HDMI-IN




UNIQUE
EYE CATCHING
BAR-RESOLUTION

REMOTE MANAGEMENT VIA ICM

USER - LCD BAR DISPLAYS

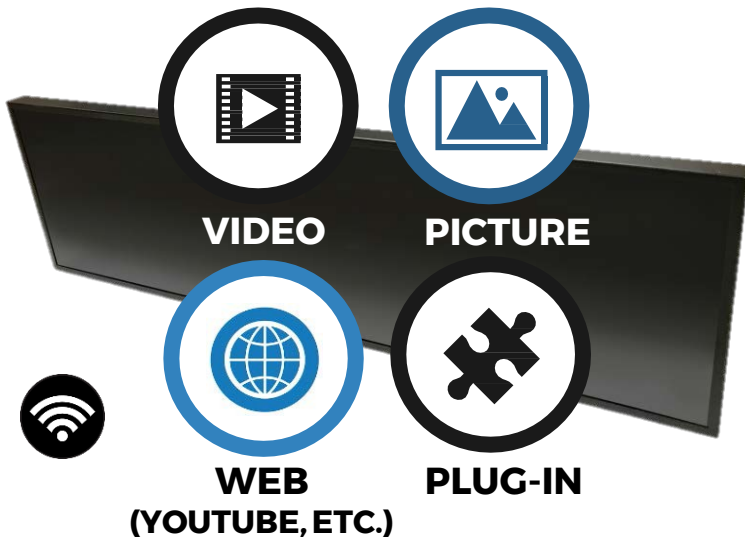

USER - WEBSITE BROWSER

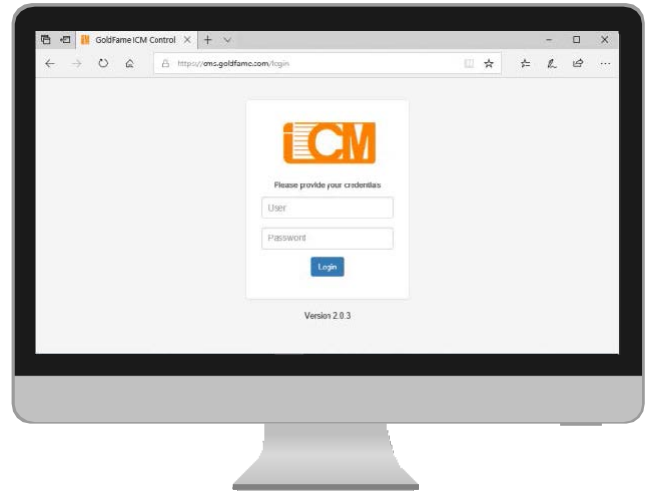

LCD bar displays have built-in ICM cloud control system. Power on, connect wi-fi, then just control by the ICM browser.

LCD bar displays link automatically to the ICM cloud server. Users can login & remote control devices anytime anywhere via the internet.



ICM CLOUD SERVER



CONTROL REMOTELY AT: <https://cms.goldfame.com/>



**ICM
CLOUD DRIVE**



**BROADCASTING
LAYOUT DESIGN**

What is ICM cloud server?
ICM cloud server enables a user to upload media and arrange it in A layout which is then scheduled to one or more LCD bar displays.


MODEL COMPARISON

Enterprise Ver.
[JIC code]

SIZE	MODELNUMBER	OUTSIDEDIMENSION (H*V*D)(MM)	ANDROID VERSION	HDMI-IN	POWER	RAM	EMMC MEMORY	2.4GHZ WI-FI	USB & MICRO SD	ICM SUPPORT
66.6"	JIC-666FILARSH216-03	1676.8×376.5×30.2	7.1	Y	AC IEC-C7	2GB	16GB	Y	Y	Y
39.6"	JIC-396FMLCRSH216-03	963.2×377.5×30.2	7.1	Y	DC USB-C	2GB	16GB	Y	Y	Y
35.9"	JIC-359FMLCRSH216-03	899.5×262.5×30.2	7.1	Y	DC USB-C	2GB	16GB	Y	Y	Y
28.8"	JIC-288FICRSH216-03	724.5×250.5×30.2	7.1	Y	DC USB-C	2GB	16GB	Y	Y	Y

39.6"	GF-396FMLCRS6208-04	963.2×377.5×30.2	6.0	N	DC USB-C	1GB	8GB	Y	Y	Y
35.9"	GF-359FMLCRS6208-04	899.5×262.5×30.2	6.0	N	DC USB-C	1GB	8GB	Y	Y	Y
28.8"	GF-288FILCRS6208-04	724.5×164.5×30.2	6.0	N	DC USB-C	1GB	8GB	Y	Y	Y

Lite Ver.
[GF code]
(*Launch 2020Q2)

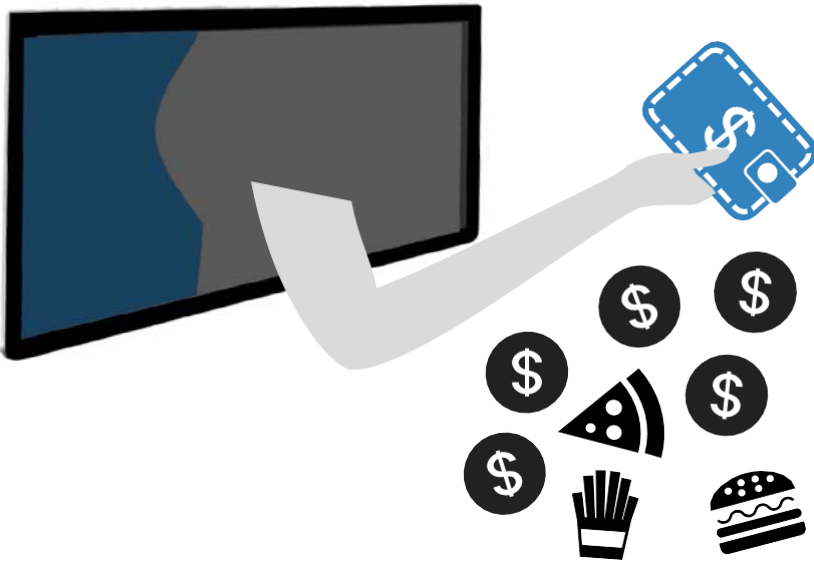

Where to display?

- Restaurant
- Retail store
- Supermarket
- Pop-up booth
- Exhibition
- Public transportation

What to display?

- Product / meal display
- Menu
- Seasonal recommendation
- Price tag
- Sale offer
- Route map
- Other advertisements



CAUTION:

- AUTION RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE.
- DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.
- Do not ingest battery, Chemical Burn Hazard. This product contains a button cell battery. If the button cell battery is swallowed, it can cause severe internal burns in just 2 hours and can lead to death.
- Keep new and used batteries away from children.
- If the battery compartment does not close securely, stop using the product and keep it away from children.
- If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.
- Do not disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion.
- Do not leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas.
- Do not expose the battery to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.



ICM LCD 條形顯示器

數位廣告機
一體化 安卓 智能顯示器

插電、連接 WI-FI、立即播放!



GOLD FAME TECHNOLOGY

WEBSITE: [HTTPS://ICM.GOLDFAME.COM](https://icm.goldfame.com)

EMAIL: [ICM@GOLDFAME.COM](mailto:icm@goldfame.com)

TEL: + 852 2330 - 8319

FAX: + 852 2947 - 5082



GOLD FAME TECHNOLOGY

WEBSITE: [HTTPS://ICM.GOLDFAME.COM](https://icm.goldfame.com)

EMAIL: ICM@GOLDFAME.COM

TEL: + 852 2330 - 8319

FAX: + 852 2947 - 5082



66.6" LCD 條形顯示器

數位廣告機 一體化 安卓 智能顯示器



- 安卓系統 7.1



- 3840 X 810 像素 (4K液晶面板)



- 超廣視角IPS TFT RGB彩色顯示器



- 通過WI-FI及ICM伺服器輕鬆進行遠程管理 (內附ICM平台 / 亦可與客戶APP兼容)

產品規格

產品名稱	66.6" LCD 條形顯示屏		
產品型號	JIC-666FILARSH216-03		

顯示規格

顯示尺寸(mm)	1649.66(H) x 348.37(V)[66.6"]	支援顏色	16.7M
面框開口尺寸(mm)	1654.8(H) x 354.5(V)	顯示模式	IPS常黑透射
外觀尺寸(mm)	1676.8(H) x 376.5(V) x 30.2(D)	表面處理	霧面 3% 硬度 2H
顯示技術	a-Si TFT active matrix	可視角度	全視角 89/89/89/89(typ.)(CR≥10)
像素分辨率	3840x810	亮度	350 cd/cm ² (typ.)
像素間距	0.4296(H) x 0.4296(W)	對比度	1400:1 (typ.)
像素排列	RGB垂直形狀	刷新率	59Hz

系統規格

CPU	ARM Cortex-A53 A64 64bit 4-core	系統	安卓 7.1
RAM	2 GB (最大支持: 4 GB)	端口	USB 2.0 x2 (支持滑鼠操作), micro SDx1, HDMI-IN x1, HDMI-OUTx1
eMMC記憶體	16 GB (最大支持: 128 GB)	照片格式	BMP, JPEG, PNG, GIF, etc.
網絡連接	10M/100M 以太網端口 x1, Wi-Fi 2.4G	影像格式	AVI, MOV, MPEG, MP4, WMV, WEBM, etc.
音源輸出	3.5 mm 音頻插孔, 8R/3W揚聲器	產品淨重	10.5kg
電壓	AC 100V~240V	VESA背掛(mm)	75 x 75, 100 x 100, 100 x 200
能源消耗	124W(typ.)	語言	中文, 英文, 日文, 韓文, etc. (自選語言擴展)
電源連接	IEC-C78字腳插頭		
儲存及工作溫度	Tst: -20~60 °C; Top: 0~50 °C		



GOLD FAME TECHNOLOGY

WEBSITE: [HTTPS://ICM.GOLDFAME.COM](https://icm.goldfame.com)

EMAIL: ICM@GOLDFAME.COM

TEL: + 852 2330 - 8319

FAX: + 852 2947 - 5082



39.6" LCD 條形顯示器

數位廣告機 一體化 安卓 智能顯示器



- 安卓系統 7.1



- 1920 X 720 像素



- 超廣視角SUPER MVA RGB彩色顯示器



- 通過WI-FI及ICM伺服器輕鬆進行遠程管理 (內附ICM平台 / 亦可與客戶APP兼容)

產品規格

產品名稱	39.6" LCD條形顯示屏
產品型號	JIC-396FMLCRSH216-03

顯示規格

顯示尺寸(mm)	940.9(H) x 353.5(V)[39.6"]	支援顏色	16.7M
面框開口尺寸(mm)	943.2(H) x 357.5(V)	顯示模式	MVA 常黑透射
外觀尺寸(mm)	963.2(H) x 377.5(V) x 30.2(D)	表面處理	霧面 2% 硬度 2H
顯示技術	a-Si TFT activematrix	可視角度	全視角 89/89/89/89(typ.)(CR≥10)
像素分辨率	1920x720	亮度	350 cd/cm ² (typ.)
像素間距	0.49005(H) x 0.49005(W)	對比度	4000:1(typ.)
像素排列	RGB垂直形狀	刷新率	59Hz

系統規格

CPU	ARM Cortex-A53 A64 64bit4-core	系統	安卓7.1
RAM	2 GB (最大支持: 4GB)	端口	USB 2.0 x2 (支持滑鼠操作), micro SDx1, HDMI-IN x1, HDMI-OUTx1
eMMC記憶體	16 GB (最大支持: 128GB)	照片格式	BMP, JPEG, PNG, GIF, etc.
網絡連接	10M/100M 以太網端口 x1, Wi-Fi2.4G	影像格式	AVI, MOV, MPEG, MP4, WMV, WEBM, etc.
音源輸出	3.5 mm 音頻插孔, 8R/3W揚聲器	產品淨重	4.5kg
變壓器電壓	輸入 AC 100V~240V; 輸出 DC 12V~5A	VESA背掛(mm)	75 x 75, 100 x 100
能源消耗	46W(typ.)	語言	中文, 英文, 日文, 韓文, etc. (自選語言擴展)
電源連接	USBType-C		
儲存及工作溫度	Tst: -20~60°C; Top: 0~50°C		



GOLD FAME TECHNOLOGY

WEBSITE: [HTTPS://ICM.GOLDFAME.COM](https://icm.goldfame.com)

EMAIL: ICM@GOLDFAME.COM

TEL: + 852 2330 - 8319

FAX: + 852 2947 - 5082

35.9" LCD 條形顯示器

數位廣告機 一體化 安卓 智能顯示器



- 安卓系統 7.1



- 1920 X 538 像素



- 超廣視角SUPER MVA RGB彩色顯示器



- 通過WI-FI及ICM伺服器輕鬆進行遠程管理 (內附ICM平台 / 亦可與客戶APP兼容)

產品規格

產品名稱	35.9" LCD條形顯示屏
產品型號	JIC-359FMLCRSH216-03

顯示規格

顯示尺寸(mm)	878.1(H) x 243.0(V)[35.9"]	支援顏色	16.7M
面框開口尺寸(mm)	880.5(H) x 244.5(V)	顯示模式	MVA 常黑透射
外觀尺寸(mm)	899.5(H) x 262.5(V) x 30.2(D)	表面處理	霧面 1% 硬度 3H
顯示技術	a-Si TFT activematrix	可視角度	全視角 88/88/88/88(typ.)(CR≥10)
像素分辨率	1920x538	亮度	350 cd/cm ² (typ.)
像素間距	0.45735(H) x 0.4494(V)	對比度	5000:1(typ.)
像素排列	RGB垂直形狀	刷新率	59Hz

系統規格

CPU	ARM Cortex-A53 A64 64bit4-core	系統	安卓7.1
RAM	2 GB (最大支持: 4GB)	端口	USB 2.0 x2 (支持滑鼠操作), micro SDx1, HDMI-IN x1, HDMI-OUTx1
eMMC記憶體	16 GB (最大支持: 128GB)	照片格式	BMP, JPEG, PNG, GIF, etc.
網絡連接	10M/100M 以太網端口 x1, Wi-Fi2.4G	影像格式	AVI, MOV, MPEG, MP4, WMV, WEBM, etc.
音源輸出	3.5 mm 音頻插孔, 8R/3W揚聲器	產品淨重	4.2kg
變壓器電壓	輸入 AC 100V~240V; 輸出 DC 12V~5A	VESA背掛(mm)	75 x 75, 100 x 100
能源消耗	28W(typ.)	語言	中文, 英文, 日文, 韓文, etc. (自選語言擴展)
電源連接	USBType-C		
儲存及工作溫度	Tst: -20~60 °C; Top: 0~50 °C		



GOLD FAME TECHNOLOGY

WEBSITE: [HTTPS://ICM.GOLDFAME.COM](https://icm.goldfame.com)

EMAIL: ICM@GOLDFAME.COM

TEL: + 852 2330 - 8319

FAX: + 852 2947 - 5082



28.8" LCD 條形顯示器

數位廣告機 一體化 安卓 智能顯示器



- 安卓系統 7.1



- 1920 X 605 像素



- 超廣視角IPS TFT RGB彩色顯示器



- 通過WI-FI及ICM伺服器輕鬆進行遠程管理 (內附ICM平台 / 亦可與客戶APP兼容)

產品規格

產品名稱	28.8" LCD條形顯示屏
產品型號	JIC-288FILCRSH216-03

顯示規格

顯示尺寸(mm)	698.4(H) x 219.0(V) [28.8"]	支援顏色	16.7M
面框開口尺寸(mm)	704.5(H) x 230.5(V)	顯示模式	IPS常黑透射
外觀尺寸(mm)	724.5(H) x 250.5(V) x 30.2(D)	表面處理	霧面 1% 硬度 3H
顯示技術	a-Si TFT activematrix	可視角度	全視角 89/89/89/89(typ.)(CR≥10)
像素分辨率	1920x605	亮度	400 cd/cm ² (typ.)
像素間距	0.36375(H) x 0.36375(W)	對比度	1400:1(typ.)
像素排列	RGB垂直形狀	刷新率	59Hz

系統規格

CPU	ARM Cortex-A53 A64 64bit4-core	系統	安卓7.1
RAM	2 GB (最大支持: 4GB)	端口	USB 2.0 x2 (支持滑鼠操作), micro SDx1, HDMI-IN x1, HDMI-OUTx1
eMMC記憶體	16 GB (最大支持: 128GB)	照片格式	BMP, JPEG, PNG, GIF, etc.
網絡連接	10M/100M 以太網端口 x1, Wi-Fi2.4G	影像格式	AVI, MOV, MPEG, MP4, WMV, WEBM, etc.
音源輸出	3.5 mm 音頻插孔, 8R/3W揚聲器	產品淨重	3.3kg
變壓器電壓	輸入 AC 100V~240V; 輸出 DC 12V~5A	VESA背掛(mm)	75 x 75, 100 x 100
能源消耗	30W(typ.)	語言	中文, 英文, 日文, 韓文, etc. (自選語言擴展)
電源連接	USBType-C		
儲存及工作溫度	Tst: -20~60°C; Top: 0~50°C		

ICM 數位廣告機




一體化結構

已嵌入**安卓**系統
只需插入電源線設置
毋需額外接駁電腦或機頂盒




透過瀏覽器進行遠程管理

插入電源、連接WI-FI後
所有播放都可以經過WEB-BASED
ICM介面遠程控制



排程播放

提前排程各日子、時段的播放
(I.E. 午餐時段 → 晚餐時段)
開機後自動播放



分割播放

將顯示器分區
同時顯示多個不同的媒體
(I.E. 影片、照片、實時新聞、天氣等)



本地播放

除了遠程控制外
亦支持各種本地輸入
(I.E. USB, MICRO-SD, HDMI)



實時同步播放


透過HDMI-OUT及HDMI-IN
達成多個顯示器同步播放




UNIQUE
EYE CATCHING
BAR-RESOLUTION

遠程管理

客戶端 - LCD條形顯示器

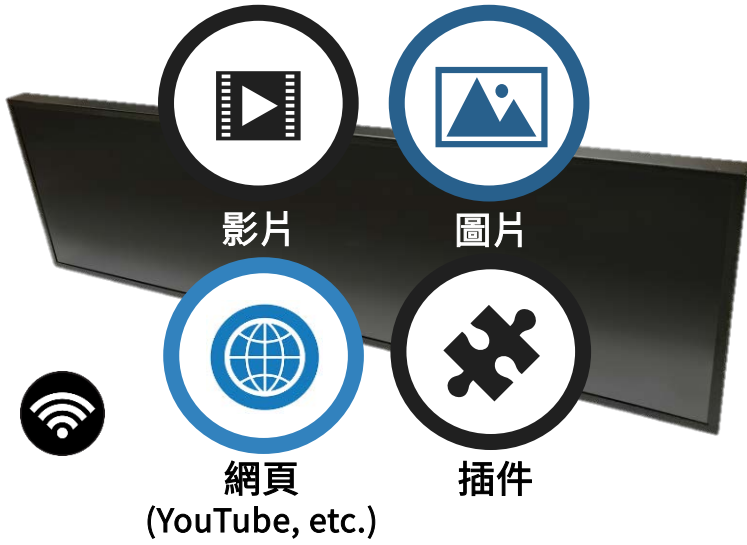

客戶端 - 網頁瀏覽器

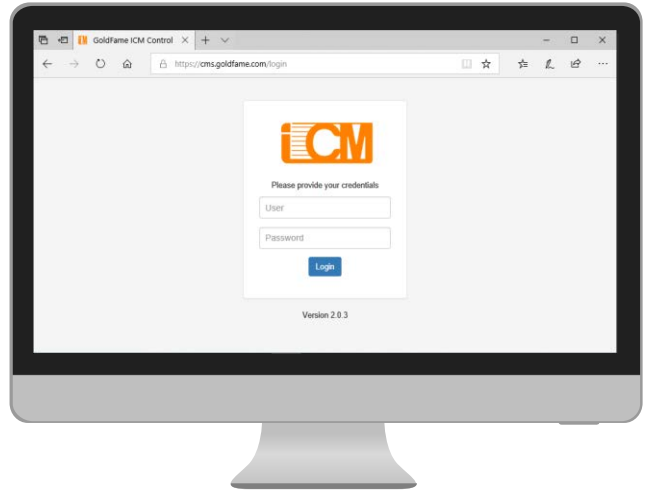

所有ICM顯示器都內置ICM應用程式。插電、連接Wi-Fi、然後由ICM瀏覽器控制播放。

ICM顯示器自動鏈接至ICM伺服器，用戶可以通過互聯網登入並隨時隨地遠程控制您的所有LCD顯示器。

ICM 伺服器



遠程連接網址: <https://cms.goldfame.com/>



ICM
雲端硬碟



播放
佈局設計

什麼是ICM伺服器?

用戶可以通過ICM上載媒體，在佈局設計頁面上設定播放版面，然後將其排程在一個或多個ICM顯示器上播放。


型號比較

企業版本
[JIC Code]

尺寸	產品型號	外觀尺寸 (H*V*D) (MM)	安卓版本	HDMI 輸入	電源輸入	RAM	EMMC 記憶體	2.4GHZ WI-FI	USB & MICRO SD	ICM 支援
66.6"	JIC-666FILARSH216-03	1676.8×376.5×30.2	7.1	Y	AC IEC-C7	2 GB	16 GB	Y	Y	Y
39.6"	JIC-396FMLCRSH216-03	963.2×377.5×30.2	7.1	Y	DC USB-C	2 GB	16 GB	Y	Y	Y
35.9"	JIC-359FMLCRSH216-03	899.5×262.5×30.2	7.1	Y	DC USB-C	2 GB	16 GB	Y	Y	Y
28.8"	JIC-288FILCRSH216-03	724.5×250.5×30.2	7.1	Y	DC USB-C	2 GB	16 GB	Y	Y	Y

39.6"	GF-396FMLCRS6208-04	963.2×377.5×30.2	6.0	N	DC USB-C	1 GB	8 GB	Y	Y	Y
35.9"	GF-359FMLCRS6208-04	899.5×262.5×30.2	6.0	N	DC USB-C	1 GB	8 GB	Y	Y	Y
28.8"	GF-288FILCRS6208-04	724.5×164.5×30.2	6.0	N	DC USB-C	1 GB	8 GB	Y	Y	Y

Lite版本
[GF Code]
(*2020Q2推出)

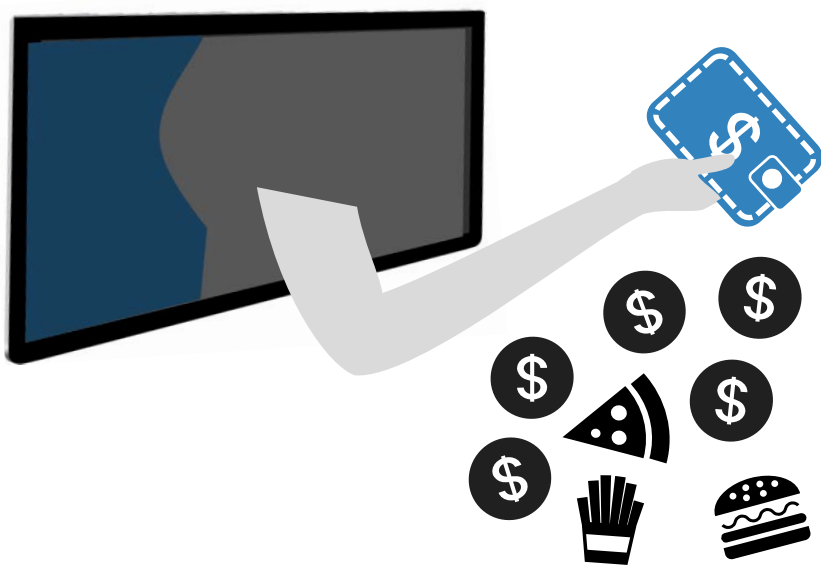

在哪裡展示？

- 餐廳
- 零售店
- 超級市場
- 展覽
- 公共交通工具

展示什麼？

- 產品/食品
- 餐牌
- 季節推薦
- 價格標籤
- 促銷優惠
- 路線地圖
- 其他廣告



CAUTION:

- AUTION RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE.
- DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS.
- Do not ingest battery, Chemical Burn Hazard. This product contains a button cell battery. If the button cell battery is swallowed, it can cause severe internal burns in just 2 hours and can lead to death.
- Keep new and used batteries away from children.
- If the battery compartment does not close securely, stop using the product and keep it away from children.
- If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.
- Do not disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion.
- Do not leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas.
- Do not expose the battery to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.